

RELIABILITY




POWERTRONIX **AURIGA UPS** is complete and cost effective power protection solutions delivering premium VFI online double conversion for IT and electrical infrastructures in corporate, medical, banking and industrial applications.

100% MADE IN ITALY, **AURIGA UPS** adopt PFC IGBT-based topology resulting in the highest levels of efficiency ( 0.99 input power factor - THDi <2%) and reliability for all mission critical loads for all three-phase installations.

Featuring multilanguage LCD display, RS232 port, BMS communication interface (DRY CONTACT & MODBUS RTU PROTOCOL BOARD), intelligent slot for SNMP adapter, **AURIGA UPS** is real time energy sentinel able to alert you in any situation.

Combining proven performance with technical innovation to deliver pure quality to any mission critical load, **AURIGA UPS** is your best choice.

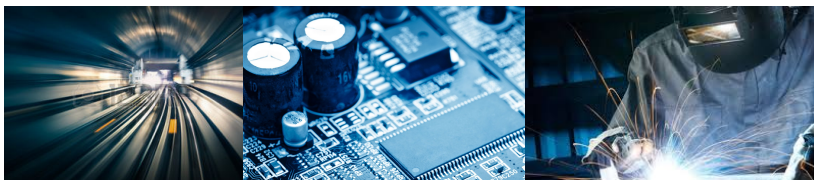

MAIN TECHNICAL DATA	AURIGA 60	AURIGA 80	AURIGA 100
UPS Topology	VFI On-Line Double Conversion		
Converter	Power factor correction PFC IGBT-based		
Inverter	High frequency IGBT inverter transformerless		
Static switch	Electronic static switch plus contactor		
Cooling	Forced air		
Input nominal voltage	3Ph+N 380/400/415V		
Input nominal frequency	50 or 60 Hz		
Input frequency tolerance	40 ÷ 70 Hz		
Maximum input current 3Ph+N@400V			
Power factor	0.99		
Soft start	0 ÷ 100% in 30 sec		
Backfeed protection	available		
Input current distortion	THDi ≤2%		
Bypass nominal voltage	3Ph 380/400/415V		
Bypass voltage tolerance	±20%		
Bypass factory setting	±10%		
Bypass nominal frequency	50 or 60 Hz		
Bypass accepted overload	10In per 100ms		
Manual bypass	with mechanical lock		
Output active power	54kW	72kW	90kW
Nominal output voltage	3Ph 380/400/415V		
Nominal output current 3ph 3Ph+N@400V	78A	104A	129A
Output power factor	0.9		
Output voltage static variation	± 1%		
Output voltage dynamic variation	± 5%		
Crest factor	3:1		
Output voltage distortion linear load	≤ 2%		
Output voltage distortion non linear load	≤ 3%		
Output frequency	50Hz or 60Hz		
Output frequency stability	0.01%		
UPS system efficiency	up to 96%		
Overload	125% for 10 minutes 150% for 60 seconds		

MAIN TECHNICAL DATA	AURIGA 60	AURIGA 80	AURIGA 100
Battery type	VRLA AGM (Ni-Cd on request)		
Number of elements	360		
Battery nominal voltage	720 Vdc		
Battery voltage range	600 ÷ 830 Vdc		
Battery maximum charging current	25A		
Battery charging profile	DIN 41733 Charging voltage: 810Vdc Temperature compensated battery charging profile		
Battery low threshold (factory setting)	640 Vdc		
Battery management & test	Supervised battery management & settable regular test		
Remote signals	Dry contact board - remote EPO		
Standard interfaces and protocol	RS232 port & MODBUS RTU + slot for communication options		
Monitoring software	UPSMAN & UPSMON		
Communication options	web adapter SNMP (Generex CS121 / Megatec NetAgent)		
Parallel capability (optional)	up to 8 units (closed loop via optical fiber)		
<b>MECHANICAL DATA</b>			
Case protection rating	metal case - RAL 7016 - IP20 (upgrade IP42 or IP54 on request)		
Dimensions (WxDxH mm)	410 x 830 x 1510 mm		
Weight kg (UPS no battery)	240kg	270kg	290kg
Noise level at 1m	54dB	56dB	56dB
Storing temperature	-20°C ÷ +70°C (UPS) +20°C ÷ +30°C (Battery)		
Operating temperature	+20°C ÷ +40°C		
Relative humidity	95% non condensing		
Altitude	1000m above MSL without derating (1% derating any 100m up to 2.000m)		
Ventilation	multilevel fan		
UPS moving	castors		
UPS packaging	overseas shipment suitable cartoon box on fumigated wooden pallet		
UPS packaging dimensions (WxDxH mm)	1000x1000x1800 mm * 12kg		
<b>STANDARDS</b>	European Directives: L V 2006/95/CE low voltage Directive EMC 2004/108/CE electromagnetic compatibility Directive Standards: Safety IEC EN 62040-1; EMC IEC EN 62040-2 C2 Classification in accordance with IEC 62040-3 VFI - SS - 111 IEC EN 50171 Directive*		

While every precaution has been taken to ensure accuracy and completeness herein, Powertronix assumes no responsibility, and disclaims all liability, for damages resulting from use of this information or for any errors or omissions. Specifications subject to be changed without notice.

### Main electrical features

- \* Dual input mains: separated or common
- \* Genset compatibility without any additional equipment
- \* Integrated maintenance bypass
- \* Detection circuit for backfeed protection (additional backfeed device UPS built in or in external panel)
- \* Distributed or shared battery for optimized energy storage and uninterrupted power during strings maintenance
- \* Battery temperature sensor and supervised battery management dual charging method profile
- \* UPS *eco-mode* functional profile for 99% efficiency
- \* Frequency converter profile with or without backup time 60Hz to 50Hz or viceversa

### Main electrical optional features

- \* Parallel capability for redundant or add capacity system configuration (up to 8 units)
- \* Extended runtime in external cabinet matching UPS design
- \* Extended runtime in external cabinet IP20 or open rack, complete of DC breaker
- \* UPS external cabinet galvanic isolation transformer (full system isolation)
- \* UPS I/O phase voltage and frequency configuration settable via LCD
- \* UPS upgrade to double independent outputs — EN 50171 standard
- \* Battery bank disconnection in case of UPS shutdown or according to BMS design
- \* BACS battery advanced care system for constant monitoring and harmonization of individual charging voltages

### UPS connectivity available features for immediate system status info

#### Real time information, real time solution!

- \* User friendly Multilanguage LCD (Russian and Chinese available)
- \* Event log access via LCD for on-site checking & event log download via open software
- \* Dry contact interface complete of 4 change-over contact outputs
- \* Serial connection interface via RS232/RS485 Modbus RTU for BMS full compatibility
- \* At-a-glance user view for simultaneous monitoring of all UPS systems connected in the same network
- \* Intelligent free slot for additional SNMP interface and ambient sensors (temperature, humidity, smoke etc...)
- \* UPS MAN & MON software for UPS managing and monitoring
- \* Remote LED panel for UPS status
- \* Remote EPO
- \* Remote UPS monitoring service 24/7 - 365
- \* Server, PC and/or virtual machine configured shutdown
- \* e.mail/SMS/pop up UPS status information